
EXTERNAL DIMENSIONS

(Unit: mm)

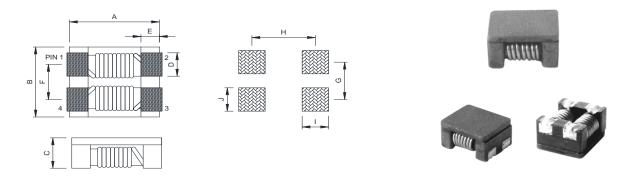

| TYPE | A | В | C | D | E | F | G | H | I | J |
|--------|---------|---------|----------|---------|---------|---------|---------|---------|---------|---------|
| YT764T | 7.0±0.4 | 6.0±0.3 | 4.0±0.3. | 1.6±0.3 | 1.7±0.3 | 3.0±0.3 | 3.0Тур. | 6.5Ref. | 2.5Ref. | 1.6Ref. |

Test Equipment and Conditions

- Impedance measured using HP-4291B impedance analyzer with HP-16092 test fixture.
- DC Resistance with CH-502A meter.
- Operating temperature : $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$.


Features


■ A compact and light-weight choke coil. Applicable for the miniaturization required to reduce the size and weight of portable equipment.


Applications

■ Used for power line noise suppression for any electronic devices. Used to counter adapter/battery line noise for relatively large electronic devices such as notebook PCs, stand-alone word processors, etc.

Schematic Test Mode:







| Part Number | Common Mode Impedance @100MHz Min / Typ. | Rated Current (A)Max. | DC Resistance (mΩ)Max. | Rated Voltage |
|-------------|--|--------------------------|------------------------------|------------------|
| YT764T-301S | $225\Omega/300\Omega$ | 5.0 | 10 | |
| YT764T-701S | $500\Omega/700\Omega$ | 4.0 | 15 | 80VDC |
| YT764T-102S | $800\Omega/1000\Omega$ | 3.0 | 17 | |

Note: 764T Cover material is Ferrite, 764PT Cover material cover is LCP